

**Features:**





- \* Available in 2 thru 24 circuit housings
- \* Voltage rating 600V (R.M.S.)
- \* Current rating 9 Amps per circuit

**Specification:**

**Material:**  
 \* UL 94V-2 nylon 66

**Electrical:**

- \* Voltage rating 600V AC/DC
- \* Current rating 9A max
- \* Withstanding Voltage: 1500V AC for 60 seconds
- \* Insulation Resistance: 1000M ohms min
- \* Temperature Rise: 30°C max
- \* Storage Temperature Range: -40°C to 105°C

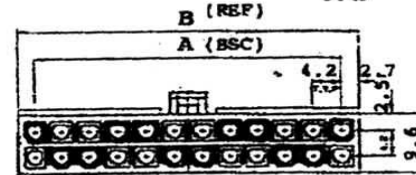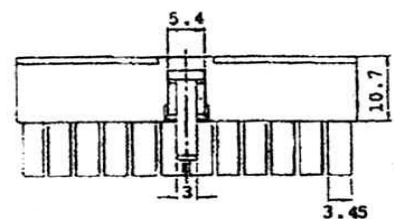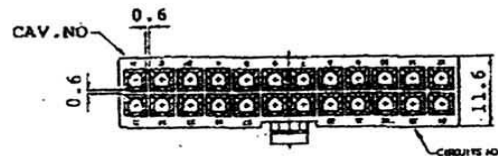

UNIT: mm

Dimensional Information -in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		.221 ( 5.6)	14	.992 (25.2)	1.213 (30.8)
4	.165 (4.2)	.386 ( 9.8)	16	1.157 (29.4)	1.378 (35.0)
6	.331 (8.4)	.551 (14.0)	18	1.323 (33.6)	1.543 (39.2)
8	.496 (12.6)	.717 (18.2)	20	1.488 (37.8)	1.709 (44.1)
10	.661 (16.8)	.892 (22.7)	22	1.654 (42.0)	1.874 (47.6)
12	.827 (21.0)	1.047 (26.6)	24	1.819 (46.2)	2.039 (51.8)



				UNIT		SCALE		PART NAME	
				MM				4.2mm MINI FIT HOUSING (MALE)	
制表日: 2005/04/21		DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE		PART NO.	REV.
		<i>Kevin</i>				± 0.5			A