


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELLY or its affiliates. Unauthorized use or reproduction of this document in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of CONNELLY is strictly prohibited. CONNELLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

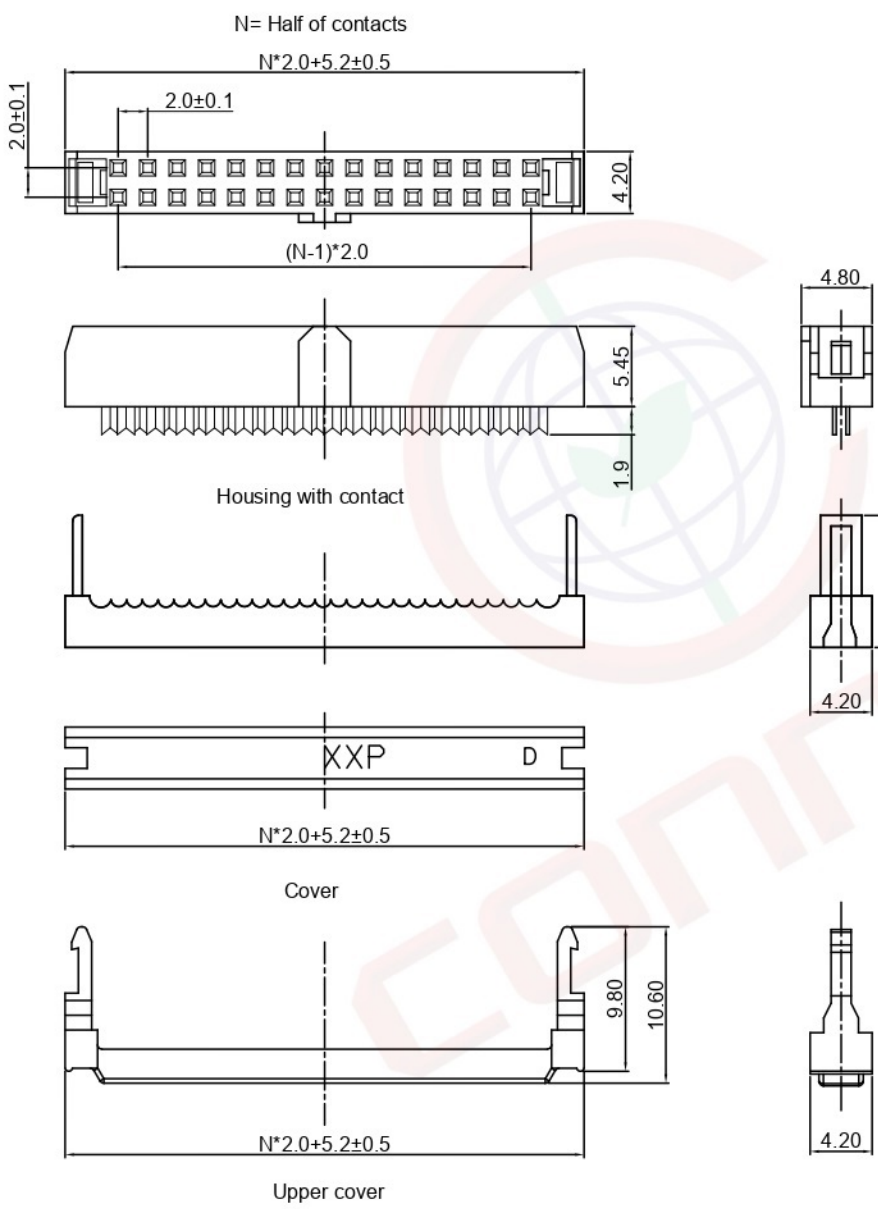

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	DRAWING UPDATE	YCH 07/27/11'		LJC 07/27/11'
C	ADD P/N CODE	JLZ 01/06/15'	HZW 01/06/15'	LJC 01/06/15'
D	DRAWING UPDATE	JLZ 08/28/18'		

NOTES:

- Materials
 - Insulator: Thermoplastic(UL 94V-0).
 - Contact: Copper alloy.
- Specification
 - Temperature range: -40~+105°C.
 - Contact resistance: 20mΩ max.
 - Insulation resistance: 1000MΩ min.
 - Dielectric withstanding voltage: AC 500V per minute.
- Part number code:

DS1017- X X X X X

 - Housing color
G: Gray
B: Black
L: Blue
 - Contact plating
8: Full gold flash
6: Full tin
2: Nickel+Gold flash
 - Polarization
A: W/
B: W/O
 - Strain relief
M: W/
N: W/O
 - No. of contacts
10 12 14 16 20 22 24 26
30 34 36 40 44 50 56 64

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 2.0mm
X.	±0.60	X.	±5°	UNITS	mm	WITH 1.0mm FLAT CABLE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017 SERIES
.XX	±0.25	.XX	±2°	Linea IDC 2mm xxMA2B-2			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1017-XXXXX-D					